


02/28/00

Please type a plus (+) inside this box - 

02-29-00

A

PTO/SB/29 (12/97)

Approved for use through 09/30/00. OMB 0651-0032

Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No.	8236-043-999	Total Pages	27
First Named Inventor or Application Identifier			
Morris and Schwartz			
Express Mail Label No.	EL 236 252 956 US		

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

ADDRESS TO:

Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231

1. ☒ Fee Transmittal Form
Submit an original, and a duplicate for fee processing
2. ☒ Specification [Total Pages 13]
(preferred arrangement set forth below)
-Descriptive title of the Invention
-Cross Reference to Related Applications
-Statement Regarding Fed sponsored R&D
-Reference to Microfiche Appendix
-Background of the Invention
-Brief Summary of the Invention
-Brief Description of the Drawings *(if filed)*
-Detailed Description of the Invention (including drawings, *if filed*)
-Claim(s)
-Abstract of the Disclosure
a. ☒ Drawing(s) (35 USC 113) [Total Sheets 7]
b. ☒ Oath or Declaration [Total Sheets 2]
a. ☒ Newly executed (original or copy)
b. ☒ Copy from a prior application (37 CFR 1.63(d))
(for continuation/divisional with Box 17 completed)
[Note Box 5 below]
i. ☐ **DELETION OF INVENTOR(S)**
Signed statement attached deleting inventor(s) named in the prior application, see 37 CFR 1.63(d)(2) and 1.33 (b).
c. ☐ Incorporation By Reference *(useable if Box 4b is checked)*
The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.
3. ☐ Microfiche Computer Program (Appendix)
7. ☐ Nucleotide and/or Amino Acid Sequence Submission
(if applicable, all necessary)
a. ☐ Computer Readable Copy
b. ☐ Paper Copy (identical to computer copy)
c. ☐ Statement verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

8. ☒ Assignment Papers (cover sheet & document(s))
9. ☐ 37 CFR 3.73(b) Statement ☐ Power of Attorney
(when there is an assignee)
10. ☐ English Translation Document *(if applicable)*
11. ☐ Information Disclosure ☐ Copies of IDS
Statement (IDS)/PTO-1449 Citations
12. ☐ Preliminary Amendment
13. ☒ Return Receipt Postcard (MPEP 503)
(Should be specifically itemized)
14. ☐ Small Entity Statement filed in prior application,
Statement(s) Status still proper and desired
15. ☐ Certified Copy of Priority Document(s)
(if foreign priority is claimed)
16. ☐ Other:

17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:

- ☒ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No: filed.

18. CORRESPONDENCE ADDRESS

☒ Customer Number or Bar Code Label20583
*(Insert Customer No. or Attach bar code label here)*or ☐ Correspondence address below

NAME			
ADDRESS			
CITY	STATE	ZIP CODE	
COUNTRY	TELEPHONE	FAX	

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231.

**FORCE SENSOR ASSEMBLY
FOR AN INFUSION PUMP**

TECHNICAL FIELD

5 The present invention relates generally to a force sensor assembly for use in infusion pumps. More particularly, the present invention relates to an assembly that reduces a load cell's sensitivity to the placement of an intravenous tube on the force sensor assembly in an infusion pump.

BACKGROUND OF THE INVENTION

10 Various devices have been developed to administer intravenous (IV) fluids to patients. One such device, a peristaltic infusion pump, operates a series of fingers or rollers which deform and occlude a resiliently deformable IV drip tube at multiple points sequentially along the tube's length. These occlusions form a wave like motion which forces the IV fluid under positive pressure along the tube. After each successive occlusion, the tube resiliently rebounds to its original diameter. The repetitive deformation of the tube may, however, ultimately weaken the resilience of
15 the tube material. After prolonged use, a tube may not fully rebound to its former shape, thereby partly or fully occluding the tube at a point along its path. In addition, IV drip sets often contain clamps, which can be inadvertently be left closed, thus partly or fully occluding the tube.

20 In order to effectively control IV fluid delivery, it is essential that the infusion system constantly determine whether fluid is in fact being delivered to the patient.

Interruptions of the fluid flow may occur for a number of reasons, such as for example, occlusion of the tube or a blocked catheter. If the pump mechanism does not stop when the tube is occluded, either the pump will stall, the pump will continue to run with no fluid delivered, or the fluid pressure in the tube will increase until the
5 obstruction catastrophically clears, possibly injuring the patient.

Accordingly, many infusion pump systems include a force or pressure sensor to determine whether there is an increase or loss of pressure within the tube. The sensor determines whether the fluid flow in the tube has been interrupted, and the pumping mechanism may be stopped and/or medical personnel notified. Because of
10 the potentially harmful consequences of such interruptions, it is important that these sensors be as accurate and reliable as possible. Also, due to an infusion pump's portability and arduous operating conditions, it is desirable for these sensors to be small and rugged.

Force or pressure sensors used in infusion pumps typically contain a plunger
15 that is either constrained in some way, such as with a pin in a hole, or of a free floating type. A constrained plunger type force sensor assembly could be comprised of an actuation plunger connected to a pin positioned and guided within a hole in a sensor housing. A transducer or load cell is positioned along the central axis of the plunger, remote from an IV drip tube. When the IV drip tube is positioned directly over the
20 central axis of the plunger, a force created by the internal pressure of the IV drip tube is applied via the plunger and pin to the load cell, which measures the applied force. In this scenario, the measured force would be comparatively accurate as there is typically only a small loss of transferred force due to friction. However, when the IV drip tube is positioned off-center to the plunger's central axis, the plunger tends to
25 rotate causing side loading on the plunger pin by the sensor housing which may bind the plunger pin in the hole. This side loading creates a friction force between the plunger pin and the sensor housing which results in a loss of force being applied to the load cell. This friction force ultimately leads to inaccurate and unreliable force measurement results. The above scenario may occur for example where an IV tube is
30 misplaced on the force sensor assembly or where the tube drifts along the plunger surface during use.

A free-floating plunger type force sensor could be comprised of an actuation plunger positioned within a hole in a sensor housing providing clearance allowing the plunger to float freely. The plunger is positioned over a well of force transmitting gel. The plunger transfers force applied by the IV tubing to the gel, which in turn transfers
5 the force to a transducer or load cell situated within the gel. An example of a gel-type sensor is disclosed in U.S. Patent No. 5,661,245. The plunger is typically allowed to angulate when a force is applied by the IV tubing to the plunger along an off-center axis. The angled plunger transfers force to the gel with less efficiency, which in turn transfers less force to the transducer or load cell situated within the gel. This reduced
10 force ultimately leads to inaccuracies in the force measurement results. Additional inaccuracies may also be experienced due to frictional reaction forces between the plunger edges and the sensor housing.

Accordingly, there is a need for a small and inexpensive force sensor assembly which provides accurate and reliable results regardless of the placement of the IV
15 tubing on the force sensor assembly.

SUMMARY OF THE INVENTION

According to the invention there is provided a force sensor assembly which is adapted to reduce a load cell's sensitivity to the positioning of an IV tube on the load
20 cell's actuation plunger. The force sensor assembly comprises a housing, a load cell at least partially disposed within the housing and a plunger, which is pivotable about an axis. The plunger may be hinged to the housing or to another fixed point proximate to the housing, and may for example be a living hinge or a small pin pivot hinge. The plunger further comprises an upper surface which may be shaped to compensate for
25 variations in measured force caused by possible misalignment of the IV tubing on the plunger's upper surface. The plunger also comprises an underside surface distal from the upper surface.

In use an IV tube is placed on the plunger's upper surface, pressure within the IV tube applies a force to the upper surface of the plunger, causing the plunger to pivot
30 about the axis. The pivoting plunger's underside makes contact with the load cell and thereby wholly transfers the applied force to the sensor for measurement.

BRIEF DESCRIPTION OF THE DRAWINGS

For a better understanding of the nature and objects of the invention, reference should be made to the following detailed description taken in conjunction with the accompanying drawings, in which:

5 FIG. 1 is a cross sectional diagrammatic view of an IV tube enclosed within an infusion pump;

 FIG. 2 is an exploded isometric view of an embodiment of the present invention;

 FIG. 3 is an isometric view of the present invention with an IV tube in a first
10 orientation;

 FIG. 4 is a diagrammatic side view of the sensor assembly of FIG. 3;

 FIG. 5 is an isometric view of an alternative embodiment of the invention;

 FIG. 6 is an isometric view of yet another alternative embodiment of the invention;

15 FIG. 7 is an isometric view of an embodiment of the present invention with an IV tube in a second orientation;

 FIG. 8 is a diagrammatic side view of the sensor assembly of FIG. 7;

 FIG. 9 is a diagrammatic side view similar to that of FIG. 8;

 FIG. 10 is an isometric view of an alternative embodiment of the present
20 invention;

 FIG. 11 is an exploded isometric view of a further alternative embodiment of the present invention;

 FIG. 12 is an isometric view of yet another alternative embodiment of the present invention.

25

DETAILED DESCRIPTION OF THE INVENTION

FIG. 1 illustrates a cross sectional view of an IV tube enclosed within an infusion pump, at the load cell. The IV tube 100 is compressed between a clamping member 102 and a force sensor assembly 104. Ideally the IV tube 100 is positioned
30 directly over the force sensor assembly 104, centered on centerline 106, such that the measured force at the force sensor assembly and a force created by the internal pressure of the IV tube 100 lie along the same plane. While this ideal condition

ensures high force measurement accuracy, it is often difficult to guarantee under normal operating conditions.

FIG. 2 shows an exploded isometric view of an embodiment of the present invention. The sensor assembly 200 comprises a housing structure 202 defining a hole therethrough 204. A pressure or load cell 206 is disposed within the housing 202. The load cell 206 is preferably located directly under the aforementioned hole 204 and is of any typical construction (i.e. gel or oil filled with micro-machined silicon die, direct die contact, strain gage etc.). The load cell is selected to have a particular construction that provides little or no mechanical friction in its force transfer mechanism (not shown) to its sensing element (not shown) and is also relatively insensitive to the location of the measured applied force. A suitable sensor may be similar to the sensor disclosed in U.S. Patent No. 5,760,313 which is hereby incorporated by reference. An actuation plunger 216 is fastened, by means of a screw 210 or the like, to a low mechanical friction hinge 208 that provides support in all directions, but allows rotation in an actuation direction. Such a hinge may, for example, be a living hinge or a small pin pivot hinge as depicted by reference numeral 1102 in FIG. 11. The living hinge may for example be a resilient metal or plastic strip, as is known in the art. Hinge 208 is in turn fastened to the housing 202 by means of another screw 212. It should be appreciated that one could use other fastening means instead of screws 210 and 212, such as for example glue or rivets. Both the shape of the plunger's upper surface 214 and the shape of the plunger's underside 218, may be varied to provide optimum results. This embodiment utilizes a circular shaped upper surface 214 and a chamfered underside 218. The underside 218 of the hinged plunger 216 is shaped so that it preferably contacts with the load cell 206 at a single contact point. Other shapes, such as for example a semicircular shaped underside, may also be utilized. A base 220 seals the housing 202 on the side distal from the hole 204. The base 220 furthermore fastens the sensor 206 in the housing 202 and includes contacts 222 disposed thereon, which connect outputs 224 from the sensor 206 to other measurement circuitry (not shown).

FIG. 3 shows an isometric view of the present invention with an IV tube in a first orientation. In this preferred embodiment, an IV drip tube 302 is placed across the sensor assembly 300, perpendicular to the hinge axis. This orientation is preferred

as the force sensor assembly 300 is not subject to a moment arm effect discussed *infra*. FIG. 4 illustrates a diagrammatic side view of the sensor assembly of FIG. 3. If the IV tubing crosses the plunger 402 off-center applying a force 400 to the plunger 402, the hinge, rotatable about hinge axis 404, provides a reaction force minimizing or
5 preventing angulation of the plunger 402. This embodiment of the sensor assembly thus gives a more accurate reading irrespective of whether or not the tube is centered above the load cell 408 or not. Therefore, little or no reduction in force is transmitted to the load cell through the plunger from the IV tube if it is positioned off-center to the load cell.

10 FIG. 5 shows an isometric view of an embodiment of the invention. Sensor assembly 300 includes a modified upper surface 500 of the plunger. Square upper surface 500 is preferably utilized in conjunction with the embodiment described in relation to FIGS. 3 and 4, where the tube is oriented perpendicular to the hinge axis. The square shaped upper surface 500 maintains a constant area along the hinge axis.

15 FIG. 6 shows an isometric view of another embodiment of upper surface 600. The upper surface of the plunger may be shaped so that the tubing contact area changes with the distance of the IV tubing from the location of the center of the load cell. A change in the tubing contact area produces a change in the force transmitted to the plunger due to tubing internal pressure, and therefore a change in the force
20 relationship with the load cell. Hourglass shaped upper surface 600 is also preferably utilized in conjunction with the embodiment described in relation to FIGS. 3 and 4. The hourglass shape, when implemented in the appropriate orientation to the hinge axis, can provide an increase in tubing contact area with an increase in the distance from the centerline of the load cell. This can counteract any loss in force to the load cell due to
25 side loading of the hinge components, thus minimizing any effects of the IV tubing being off center.

FIG. 7 shows an isometric view of an alternative embodiment of the invention with an IV tube in a second orientation. In this embodiment, IV drip tube 700 is placed across the sensor assembly 702, parallel to the hinge axis.

30 FIG. 8 illustrates a diagrammatic side view of the sensor assembly shown in FIG. 7. A plunger 802 is pivotably hinged about a line 800, allowing the plunger to make single point contact with a load cell 804. When a force 806, caused by pressure

within the IV tube, is applied directly above the load cell 804, the load cell measures a reaction force 808 which is substantially the same as the applied force 806. However, as illustrated in FIG. 9, when a force 900 is applied off-center to the load cell 804, reaction force 902 measured at load cell 804 will be larger than the applied force 900, due to a moment arm effect. As there is no way to accurately determine the distance of the applied force 900 from hinge line 800, this orientation of the IV tube on the sensor assembly is not preferred. To overcome this problem, the shape of the upper surface of the plunger may once again be varied to compensate for the misalignment of the IV tube. Instead of a round upper surface of the plunger as shown in FIGS. 2, 3 and 7, or an hourglass shaped upper surface as shown in FIG. 6, the upper surface of the plunger may be shaped so that the tubing contact area changes with the distance of the IV tubing from the location the hinge axis 800. A change in the tubing contact area produces a change in transmitted force due to the tubing internal pressure and thus a change in the force relationship with the load cell. Variations in measured force caused by the misplacement of the tube on the upper surface of the plunger may therefore be counteracted by tailoring the shape of the upper surface of the plunger. As shown in FIG. 10, a triangular or tear drop shaped upper surface 1000, narrowing away from the hinge axis may preferably be utilized in conjunction with the embodiment described above in relation to FIGS. 7-9, where the tube is oriented parallel to the hinge axis.

FIG. 11 illustrates an exploded isometric view of another embodiment of the present invention. The living hinge 208 of FIG. 2 has been replaced with a plunger 1100 that is itself hinged to the housing 202 by means of a small hinge pin 1102. The separately hinged actuation plunger 1100 provides stability and low mechanical friction, resulting in low sensitivity to the positioning of an off-centered IV tube.

Other embodiments of the present invention may include a force assembly where the hinge and actuation plunger are formed integral with the hinge support housing (i.e. all molded together as one piece) instead of separate parts. FIG. 12 shows an embodiment of the present invention with a plastic living hinge 1200 integrated into the housing of the IV mechanism. The actuation plunger may also be held by flexible supports at several points around its circumference to minimize moment arm changes with tubing off-center positioning. Furthermore, the hinge could

be attached to some other structure of the IV pump proximate to the sensor assembly housing.

The foregoing descriptions of specific embodiments of the present invention are presented for purposes of illustration and description only. They are not intended to be exhaustive or to limit the invention to the precise forms disclosed, obviously many modifications and variations are possible in view of the above teachings. The embodiments were chosen and described in order to best explain the principles of the invention and its practical applications, to thereby enable others skilled in the art to best utilize the invention and various embodiments with various modifications as are suited to the particular use contemplated. It is intended that the scope of the invention be defined by the following claims and their equivalents.

FIG. 1
FIG. 2
FIG. 3
FIG. 4
FIG. 5
FIG. 6
FIG. 7
FIG. 8
FIG. 9
FIG. 10
FIG. 11
FIG. 12
FIG. 13
FIG. 14
FIG. 15
FIG. 16
FIG. 17
FIG. 18
FIG. 19
FIG. 20
FIG. 21
FIG. 22
FIG. 23
FIG. 24
FIG. 25
FIG. 26
FIG. 27
FIG. 28
FIG. 29
FIG. 30
FIG. 31
FIG. 32
FIG. 33
FIG. 34
FIG. 35
FIG. 36
FIG. 37
FIG. 38
FIG. 39
FIG. 40
FIG. 41
FIG. 42
FIG. 43
FIG. 44
FIG. 45
FIG. 46
FIG. 47
FIG. 48
FIG. 49
FIG. 50
FIG. 51
FIG. 52
FIG. 53
FIG. 54
FIG. 55
FIG. 56
FIG. 57
FIG. 58
FIG. 59
FIG. 60
FIG. 61
FIG. 62
FIG. 63
FIG. 64
FIG. 65
FIG. 66
FIG. 67
FIG. 68
FIG. 69
FIG. 70
FIG. 71
FIG. 72
FIG. 73
FIG. 74
FIG. 75
FIG. 76
FIG. 77
FIG. 78
FIG. 79
FIG. 80
FIG. 81
FIG. 82
FIG. 83
FIG. 84
FIG. 85
FIG. 86
FIG. 87
FIG. 88
FIG. 89
FIG. 90
FIG. 91
FIG. 92
FIG. 93
FIG. 94
FIG. 95
FIG. 96
FIG. 97
FIG. 98
FIG. 99
FIG. 100
FIG. 101
FIG. 102
FIG. 103
FIG. 104
FIG. 105
FIG. 106
FIG. 107
FIG. 108
FIG. 109
FIG. 110
FIG. 111
FIG. 112
FIG. 113
FIG. 114
FIG. 115
FIG. 116
FIG. 117
FIG. 118
FIG. 119
FIG. 120
FIG. 121
FIG. 122
FIG. 123
FIG. 124
FIG. 125
FIG. 126
FIG. 127
FIG. 128
FIG. 129
FIG. 130
FIG. 131
FIG. 132
FIG. 133
FIG. 134
FIG. 135
FIG. 136
FIG. 137
FIG. 138
FIG. 139
FIG. 140
FIG. 141
FIG. 142
FIG. 143
FIG. 144
FIG. 145
FIG. 146
FIG. 147
FIG. 148
FIG. 149
FIG. 150
FIG. 151
FIG. 152
FIG. 153
FIG. 154
FIG. 155
FIG. 156
FIG. 157
FIG. 158
FIG. 159
FIG. 160
FIG. 161
FIG. 162
FIG. 163
FIG. 164
FIG. 165
FIG. 166
FIG. 167
FIG. 168
FIG. 169
FIG. 170
FIG. 171
FIG. 172
FIG. 173
FIG. 174
FIG. 175
FIG. 176
FIG. 177
FIG. 178
FIG. 179
FIG. 180
FIG. 181
FIG. 182
FIG. 183
FIG. 184
FIG. 185
FIG. 186
FIG. 187
FIG. 188
FIG. 189
FIG. 190
FIG. 191
FIG. 192
FIG. 193
FIG. 194
FIG. 195
FIG. 196
FIG. 197
FIG. 198
FIG. 199
FIG. 200
FIG. 201
FIG. 202
FIG. 203
FIG. 204
FIG. 205
FIG. 206
FIG. 207
FIG. 208
FIG. 209
FIG. 210
FIG. 211
FIG. 212
FIG. 213
FIG. 214
FIG. 215
FIG. 216
FIG. 217
FIG. 218
FIG. 219
FIG. 220
FIG. 221
FIG. 222
FIG. 223
FIG. 224
FIG. 225
FIG. 226
FIG. 227
FIG. 228
FIG. 229
FIG. 230
FIG. 231
FIG. 232
FIG. 233
FIG. 234
FIG. 235
FIG. 236
FIG. 237
FIG. 238
FIG. 239
FIG. 240
FIG. 241
FIG. 242
FIG. 243
FIG. 244
FIG. 245
FIG. 246
FIG. 247
FIG. 248
FIG. 249
FIG. 250
FIG. 251
FIG. 252
FIG. 253
FIG. 254
FIG. 255
FIG. 256
FIG. 257
FIG. 258
FIG. 259
FIG. 260
FIG. 261
FIG. 262
FIG. 263
FIG. 264
FIG. 265
FIG. 266
FIG. 267
FIG. 268
FIG. 269
FIG. 270
FIG. 271
FIG. 272
FIG. 273
FIG. 274
FIG. 275
FIG. 276
FIG. 277
FIG. 278
FIG. 279
FIG. 280
FIG. 281
FIG. 282
FIG. 283
FIG. 284
FIG. 285
FIG. 286
FIG. 287
FIG. 288
FIG. 289
FIG. 290
FIG. 291
FIG. 292
FIG. 293
FIG. 294
FIG. 295
FIG. 296
FIG. 297
FIG. 298
FIG. 299
FIG. 300
FIG. 301
FIG. 302
FIG. 303
FIG. 304
FIG. 305
FIG. 306
FIG. 307
FIG. 308
FIG. 309
FIG. 310
FIG. 311
FIG. 312
FIG. 313
FIG. 314
FIG. 315
FIG. 316
FIG. 317
FIG. 318
FIG. 319
FIG. 320
FIG. 321
FIG. 322
FIG. 323
FIG. 324
FIG. 325
FIG. 326
FIG. 327
FIG. 328
FIG. 329
FIG. 330
FIG. 331
FIG. 332
FIG. 333
FIG. 334
FIG. 335
FIG. 336
FIG. 337
FIG. 338
FIG. 339
FIG. 340
FIG. 341
FIG. 342
FIG. 343
FIG. 344
FIG. 345
FIG. 346
FIG. 347
FIG. 348
FIG. 349
FIG. 350
FIG. 351
FIG. 352
FIG. 353
FIG. 354
FIG. 355
FIG. 356
FIG. 357
FIG. 358
FIG. 359
FIG. 360
FIG. 361
FIG. 362
FIG. 363
FIG. 364
FIG. 365
FIG. 366
FIG. 367
FIG. 368
FIG. 369
FIG. 370
FIG. 371
FIG. 372
FIG. 373
FIG. 374
FIG. 375
FIG. 376
FIG. 377
FIG. 378
FIG. 379
FIG. 380
FIG. 381
FIG. 382
FIG. 383
FIG. 384
FIG. 385
FIG. 386
FIG. 387
FIG. 388
FIG. 389
FIG. 390
FIG. 391
FIG. 392
FIG. 393
FIG. 394
FIG. 395
FIG. 396
FIG. 397
FIG. 398
FIG. 399
FIG. 400
FIG. 401
FIG. 402
FIG. 403
FIG. 404
FIG. 405
FIG. 406
FIG. 407
FIG. 408
FIG. 409
FIG. 410
FIG. 411
FIG. 412
FIG. 413
FIG. 414
FIG. 415
FIG. 416
FIG. 417
FIG. 418
FIG. 419
FIG. 420
FIG. 421
FIG. 422
FIG. 423
FIG. 424
FIG. 425
FIG. 426
FIG. 427
FIG. 428
FIG. 429
FIG. 430
FIG. 431
FIG. 432
FIG. 433
FIG. 434
FIG. 435
FIG. 436
FIG. 437
FIG. 438
FIG. 439
FIG. 440
FIG. 441
FIG. 442
FIG. 443
FIG. 444
FIG. 445
FIG. 446
FIG. 447
FIG. 448
FIG. 449
FIG. 450
FIG. 451
FIG. 452
FIG. 453
FIG. 454
FIG. 455
FIG. 456
FIG. 457
FIG. 458
FIG. 459
FIG. 460
FIG. 461
FIG. 462
FIG. 463
FIG. 464
FIG. 465
FIG. 466
FIG. 467
FIG. 468
FIG. 469
FIG. 470
FIG. 471
FIG. 472
FIG. 473
FIG. 474
FIG. 475
FIG. 476
FIG. 477
FIG. 478
FIG. 479
FIG. 480
FIG. 481
FIG. 482
FIG. 483
FIG. 484
FIG. 485
FIG. 486
FIG. 487
FIG. 488
FIG. 489
FIG. 490
FIG. 491
FIG. 492
FIG. 493
FIG. 494
FIG. 495
FIG. 496
FIG. 497
FIG. 498
FIG. 499
FIG. 500
FIG. 501
FIG. 502
FIG. 503
FIG. 504
FIG. 505
FIG. 506
FIG. 507
FIG. 508
FIG. 509
FIG. 510
FIG. 511
FIG. 512
FIG. 513
FIG. 514
FIG. 515
FIG. 516
FIG. 517
FIG. 518
FIG. 519
FIG. 520
FIG. 521
FIG. 522
FIG. 523
FIG. 524
FIG. 525
FIG. 526
FIG. 527
FIG. 528
FIG. 529
FIG. 530
FIG. 531
FIG. 532
FIG. 533
FIG. 534
FIG. 535
FIG. 536
FIG. 537
FIG. 538
FIG. 539
FIG. 540
FIG. 541
FIG. 542
FIG. 543
FIG. 544
FIG. 545
FIG. 546
FIG. 547
FIG. 548
FIG. 549
FIG. 550
FIG. 551
FIG. 552
FIG. 553
FIG. 554
FIG. 555
FIG. 556
FIG. 557
FIG. 558
FIG. 559
FIG. 560
FIG. 561
FIG. 562
FIG. 563
FIG. 564
FIG. 565
FIG. 566
FIG. 567
FIG. 568
FIG. 569
FIG. 570
FIG. 571
FIG. 572
FIG. 573
FIG. 574
FIG. 575
FIG. 576
FIG. 577
FIG. 578
FIG. 579
FIG. 580
FIG. 581
FIG. 582
FIG. 583
FIG. 584
FIG. 585
FIG. 586
FIG. 587
FIG. 588
FIG. 589
FIG. 590
FIG. 591
FIG. 592
FIG. 593
FIG. 594
FIG. 595
FIG. 596
FIG. 597
FIG. 598
FIG. 599
FIG. 600
FIG. 601
FIG. 602
FIG. 603
FIG. 604
FIG. 605
FIG. 606
FIG. 607
FIG. 608
FIG. 609
FIG. 610
FIG. 611
FIG. 612
FIG. 613
FIG. 614
FIG. 615
FIG. 616
FIG. 617
FIG. 618
FIG. 619
FIG. 620
FIG. 621
FIG. 622
FIG. 623
FIG. 624
FIG. 625
FIG. 626
FIG. 627
FIG. 628
FIG. 629
FIG. 630
FIG. 631
FIG. 632
FIG. 633
FIG. 634
FIG. 635
FIG. 636
FIG. 637
FIG. 638
FIG. 639
FIG. 640
FIG. 641
FIG. 642
FIG. 643
FIG. 644
FIG. 645
FIG. 646
FIG. 647
FIG. 648
FIG. 649
FIG. 650
FIG. 651
FIG. 652
FIG. 653
FIG. 654
FIG. 655
FIG. 656
FIG. 657
FIG. 658
FIG. 659
FIG. 660
FIG. 661
FIG. 662
FIG. 663
FIG. 664
FIG. 665
FIG. 666
FIG. 667
FIG. 668
FIG. 669
FIG. 670
FIG. 671
FIG. 672
FIG. 673
FIG. 674
FIG. 675
FIG. 676
FIG. 677
FIG. 678
FIG. 679
FIG. 680
FIG. 681
FIG. 682
FIG. 683
FIG. 684
FIG. 685
FIG. 686
FIG. 687
FIG. 688
FIG. 689
FIG. 690
FIG. 691
FIG. 692
FIG. 693
FIG. 694
FIG. 695
FIG. 696
FIG. 697
FIG. 698
FIG. 699
FIG. 700
FIG. 701
FIG. 702
FIG. 703
FIG. 704
FIG. 705
FIG. 706
FIG. 707
FIG. 708
FIG. 709
FIG. 710
FIG. 711
FIG. 712
FIG. 713
FIG. 714
FIG. 715
FIG. 716
FIG. 717
FIG. 718
FIG. 719
FIG. 720
FIG. 721
FIG. 722
FIG. 723
FIG. 724
FIG. 725
FIG. 726
FIG. 727
FIG. 728
FIG. 729
FIG. 730
FIG. 731
FIG. 732
FIG. 733
FIG. 734
FIG. 735
FIG. 736
FIG. 737
FIG. 738
FIG. 739
FIG. 740
FIG. 741
FIG. 742
FIG. 743
FIG. 744
FIG. 745
FIG. 746
FIG. 747
FIG. 748
FIG. 749
FIG. 750
FIG. 751
FIG. 752
FIG. 753
FIG. 754
FIG. 755
FIG. 756
FIG. 757
FIG. 758
FIG. 759
FIG. 760
FIG. 761
FIG. 762
FIG. 763
FIG. 764
FIG. 765
FIG. 766
FIG. 767
FIG. 768
FIG. 769
FIG. 770
FIG. 771
FIG. 772
FIG. 773
FIG. 774
FIG. 775
FIG. 776
FIG. 777
FIG. 778
FIG. 779
FIG. 780
FIG. 781
FIG. 782
FIG. 783
FIG. 784
FIG. 785
FIG. 786
FIG. 787
FIG. 788
FIG. 789
FIG. 790
FIG. 791
FIG. 792
FIG. 793
FIG. 794
FIG. 795
FIG. 796
FIG. 797
FIG. 798
FIG. 799
FIG. 800
FIG. 801
FIG. 802
FIG. 803
FIG. 804
FIG. 805
FIG. 806
FIG. 807
FIG. 808
FIG. 809
FIG. 810
FIG. 811
FIG. 812
FIG. 813
FIG. 814
FIG. 815
FIG. 816
FIG. 817
FIG. 818
FIG. 819
FIG. 820
FIG. 821
FIG. 822
FIG. 823
FIG. 824
FIG. 825
FIG. 826
FIG. 827
FIG. 828
FIG. 829
FIG. 830
FIG. 831
FIG. 832
FIG. 833
FIG. 834
FIG. 835
FIG. 836
FIG. 837
FIG. 838
FIG. 839
FIG. 840
FIG. 841
FIG. 842
FIG. 843
FIG. 844
FIG. 845
FIG. 846
FIG. 847
FIG. 848
FIG. 849
FIG. 850
FIG. 851
FIG. 852
FIG. 853
FIG. 854
FIG. 855
FIG. 856
FIG. 857
FIG. 858
FIG. 859
FIG. 860
FIG. 861
FIG. 862
FIG. 863
FIG. 864
FIG. 865
FIG. 866
FIG. 867
FIG. 868
FIG. 869
FIG. 870
FIG. 871
FIG. 872
FIG. 873
FIG. 874
FIG. 875
FIG. 876
FIG. 877
FIG. 878
FIG. 879
FIG. 880
FIG. 881
FIG. 882
FIG. 883
FIG. 884
FIG. 885
FIG. 886
FIG. 887
FIG. 888
FIG. 889
FIG. 890
FIG. 891
FIG. 892
FIG. 893
FIG. 894
FIG. 895
FIG. 896
FIG. 897
FIG. 898
FIG. 899
FIG. 900
FIG. 901
FIG. 902
FIG. 903
FIG. 904
FIG. 905
FIG. 906
FIG. 907
FIG. 908
FIG. 909
FIG. 910
FIG. 911
FIG. 912
FIG. 913
FIG. 914
FIG. 915
FIG. 916
FIG. 917
FIG. 918
FIG. 919
FIG. 920
FIG. 921
FIG. 922
FIG. 923
FIG. 924
FIG. 925
FIG. 926
FIG. 927
FIG. 928
FIG. 929
FIG. 930
FIG. 931
FIG. 932
FIG. 933
FIG. 934
FIG. 935
FIG. 936
FIG. 937
FIG. 938
FIG. 939
FIG. 940
FIG. 941
FIG. 942
FIG. 943
FIG. 944
FIG. 945
FIG. 946
FIG. 947
FIG. 948
FIG. 949
FIG. 950
FIG. 951
FIG. 952
FIG. 953
FIG. 954
FIG. 955
FIG. 956
FIG. 957
FIG. 958
FIG. 959
FIG. 960
FIG. 961
FIG. 962
FIG. 963
FIG. 964
FIG. 965
FIG. 966
FIG. 967
FIG. 968
FIG. 969
FIG. 970
FIG. 971
FIG. 972
FIG. 973
FIG. 974
FIG. 975
FIG. 976
FIG. 977
FIG. 978
FIG. 979
FIG. 980
FIG. 981
FIG. 982
FIG. 983
FIG. 984
FIG. 985
FIG. 986
FIG. 987
FIG. 988
FIG. 989
FIG. 990
FIG. 991
FIG. 992
FIG. 993
FIG. 994
FIG. 995
FIG. 996
FIG. 997
FIG. 998
FIG. 999
FIG. 1000

WHAT IS CLAIMED IS:

1. A force sensor assembly for use in peristaltic pumps, comprising:
a housing;
5 a load cell at least partially disposed within said housing;
a plunger, pivotable about an axis, where said plunger comprises:
an upper surface; and
an underside surface distal from said upper surface where said
underside surface cooperates with said load cell; and
10 a means for reducing said load cell's sensitivity to the positioning of an applied
force on said upper surface.
2. A force sensor assembly according to claim 1, wherein said means for reducing
said load cell's sensitivity, comprises an upper surface for receiving an intravenous
15 tube perpendicular to said axis.
3. A force sensor assembly according to claim 2, wherein said upper surface is
shaped to compensate for variations in measured force caused by the misalignment of
said applied force.
20
4. A force sensor assembly according to claim 3, wherein said upper surface
shape is selected from a group consisting of the following shapes:
circular, square or hourglass.
- 25 5. A force sensor assembly according to claim 1, wherein said means for reducing
said load cell's sensitivity, comprises an upper surface for receiving an intravenous
tube parallel to said axis.
6. A force sensor assembly according to claim 5, wherein said upper surface is
30 shaped to compensate for variations in measured force caused by the misalignment of
said applied force.

7. A force sensor assembly according to claim 6, wherein said upper surface shape is selected from a group consisting of the following shapes:
circular, teardrop or triangular.
- 5 8. A force sensor assembly according to claim 1, wherein said plunger further comprises:
a free end; and
a pivot end located at said axis.
- 10 9. A force sensor assembly according to claim 8, wherein said pivot end is rotatably coupled to said housing.
10. A force sensor assembly according to claim 8, wherein said pivot end is rotatably coupled to a body proximate said housing.
- 15 11. A force sensor assembly according to claim 8, wherein said pivot end is rotatably coupled to said housing by means of a hinge.
12. A force sensor assembly according to claim 11, wherein said is hinge is a
20 living hinge.
13. A force sensor assembly according to claim 12, wherein said living hinge is a resilient metal strip.
- 25 14. A force sensor assembly according to claim 12, wherein said living hinge is a resilient plastic strip.
15. A force sensor assembly according to claim 11, wherein said hinge is a small pin pivot hinge.
- 30 16. A force sensor assembly according to claim 15, wherein said hinge has low mechanical friction.

17. A force sensor assembly according to claim 1, wherein said load cell is a pressure transducer.
- 5 18. A force sensor assembly according to claim 1, wherein said load cell has low internal mechanical friction.
19. A force sensor assembly according to claim 1, wherein said load cell itself has a reduced sensitivity to the positioning of the applied force on said upper surface..
- 10 20. A force sensor assembly according to claim 1, wherein said underside of said plunger is shaped to contact with said load cell at a single point.
21. A force sensor assembly according to claim 1, wherein said plunger is biased
15 away from said load cell.
22. A force sensor assembly adapted to reduce a load cell's sensitivity to the positioning of an applied force, comprising:
a housing;
20 a load cell at least partially disposed within said housing; and
a plunger rotatably coupled to said housing by means of a hinge, said plunger further comprising:
an upper surface which is shaped to compensate for variations in
measured force caused by the misalignment of said applied force.; and
25 an underside surface distal from said upper surface,
such that in use a force applied to said upper surface of said plunger is transferred to said load cell by said underside of said plunger pivoting into contact with said load cell.
- 30 23. A force sensor assembly according to claim 22, wherein said hinge is a living hinge.

24. A force sensor assembly according to claim 23, wherein said hinge is a small pin pivot hinge.

8236-0043-999

ABSTRACT

A force sensor assembly for use in peristaltic pumps includes a housing and a load cell at least partially disposed within the housing. A plunger, pivotable about an axis, has an upper surface and an underside surface distal from the upper surface. The
5 underside surface cooperates with the load cell. The force sensor further includes a mechanism to reduce the load cell's sensitivity to the positioning of an applied force on the upper surface.

11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30




FIG. 1




FIG. 3




FIG. 4




FIG. 5




FIG. 6




FIG. 7

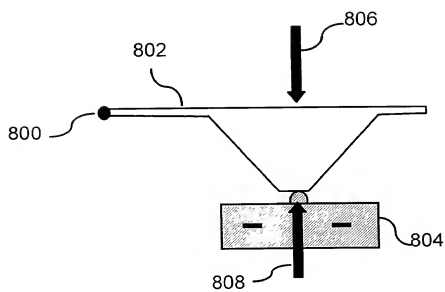


FIG. 8

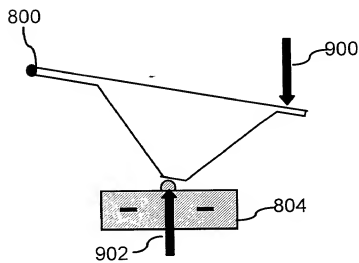


FIG. 9




FIG. 10

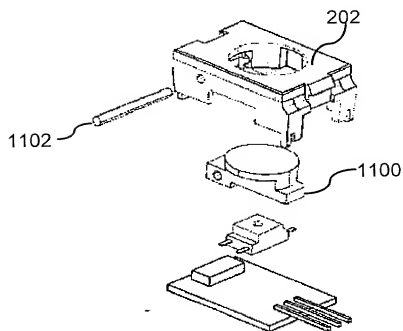


FIG. 11




FIG. 12

DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below at 201 et seq. underneath my name.

I believe I am the original, first and sole inventor if only one name is listed at 201 below, or an original, first and joint inventor if plural names are listed at 201 et seq. below, of the subject matter which is claimed and for which a patent is sought on the invention entitled

Force Sensor Assembly for an Infusion Pump

and for which a patent application:

- ☒ is attached hereto and includes amendment(s) filed on (if applicable)
☐ was filed in the United States on as Application No. (for declaration not accompanying application)
with amendment(s) filed on (if applicable)
☐ was filed as PCT international Application No. on and was amended under PCT Article 19 on (if applicable)

I hereby state that I have reviewed and understand the contents of the above identified application, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, § 119(a)-(d) of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

EARLIEST FOREIGN APPLICATION(S), IF ANY, FILED PRIOR TO THE FILING DATE OF THE APPLICATION			
APPLICATION NUMBER	COUNTRY	DATE OF FILING (day, month, year)	PRIORITY CLAIMED
			YES <input type="checkbox"/> NO <input type="checkbox"/>
			YES <input type="checkbox"/> NO <input type="checkbox"/>

I hereby claim the benefit under Title 35, United States Code, § 119(e) of any United States provisional application(s) listed below.

APPLICATION NUMBER	FILING DATE

I hereby claim the benefit under Title 35, United States Code, § 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code § 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application:

APPLICATION SERIAL NO.	FILING DATE	STATUS		
		PATENTED	PENDING	ABANDONED

POWER OF ATTORNEY: As a named inventor, I hereby appoint S. Leslie Mirock (Reg. No. 18872), Harry C. Jones, III (Reg. No. 20280), Berj A. Terzian (Reg. No. 20060), David Weid, III (Reg. No. 21094), Jonathan A. Marshall (Reg. No. 24614), Barry D. Rein (Reg. No. 22411), Stanton T. Lawrence, III (Reg. No. 25736), Charles E. McKenney (Reg. No. 22795), Philip T. Shannon (Reg. No. 24278), Francis E. Morris (Reg. No. 24615), Charles E. Miller (Reg. No. 24576), Gidon D. Stern (Reg. No. 27469), John J. Lauter, Jr. (Reg. No. 27814), Brian M. Poissant (Reg. No. 28462), Brian D. Coggio (Reg. No. 27624), Rory J. Radding (Reg. No. 28749), Stephen J. Harbulak (Reg. No. 29166), Donald J. Goodell (Reg. No. 19766), James N. Palik (Reg. No. 25510), Thomas E. Friebe (Reg. No. 29258), Laura A. Coruzzi (Reg. No. 30742), Jennifer Gordon (Reg. No. 30753), Allan A. Fanucci (Reg. No. 30256), Geraldine F. Baldwin (Reg. No. 31252), Victor N. Balancia (Reg. No. 31231), Samuel B. Abrams (Reg. No. 30605), Steven I. Wallach (Reg. No. 35402), Marcia H. Sundeen (Reg. No. 30892), Paul J. Zeiger (Reg. No. 33821), (Reg. No. 31231), Edmond R. Bannon (Reg. No. 32110), Bruce J. Barker (Reg. No. 33291), Adriane M. Adler (Reg. No. 32605), Thomas G. Rowan (Reg. No. 34419), James G. Markey (Reg. No. 31636), Thomas D. Kohler (Reg. No. 32797), Scott D. Stimpson (Reg. No. 33607), Gary S. Williams (Reg. No. 31066), William S. Galliani (Reg. No. 33885), Ann L. Gisolfi (Reg. No. 31956), Todd A. Wagner (Reg. No. 35399), Scott B. Familant (Reg. No. 35514), Kelly D. Talcott (Reg. No. 39582), Francis D. Cerreto (Reg. No. 38100), Anthony M. Inogna (Reg. No. 35203), Brian M. Rothery (Reg. No. 35340), Brian D. Siff (Reg. No. 35679), and Alan Tenenbaum (Reg. No. 34939), all of Pennie & Edmonds LLP, whose addresses are 1155 Avenue of the Americas, New York, New York 10036, 1667 K Street N.W., Washington, DC 20006 and 3300 Hillview Avenue, Palo Alto, CA 94304, and each of them, my attorneys, to prosecute this application, and to transact all business in the Patent and Trademark Office connected therewith.

SEND CORRESPONDENCE TO:		PENNIE & EDMONDS LLP 1155 Avenue of the Americas New York, N.Y. 10036-2711		DIRECT TELEPHONE CALLS TO: PENNIE & EDMONDS LLP DOCKETING (212) 790-2803	
2 0 1	FULL NAME OF INVENTOR	LAST NAME MORRIS	FIRST NAME MATTHEW	MIDDLE NAME GERALD	
	RESIDENCE & CITIZENSHIP	CITY San Diego	STATE OR FOREIGN COUNTRY California		COUNTRY OF CITIZENSHIP USA
	POST OFFICE ADDRESS	STREET 3536 Lowell Street	CITY San Diego	STATE OR COUNTRY CA	ZIP CODE 92106
2 0 2	FULL NAME OF INVENTOR	LAST NAME SCHWARTZ	FIRST NAME DONALD	MIDDLE NAME FREDERIC	
	RESIDENCE & CITIZENSHIP	CITY San Diego	STATE OR FOREIGN COUNTRY California		COUNTRY OF CITIZENSHIP USA
	POST OFFICE ADDRESS	STREET 7025 Charmant Drive, #301	CITY San Diego	STATE OR COUNTRY CA	ZIP CODE 92122

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon

SIGNATURE OF INVENTOR 1	<i>Matthew A. Morris</i>
DATE	<i>February 15, 2000</i>
SIGNATURE OF INVENTOR 2	<i>Donald Frederic Schwartz</i>
DATE	<i>February 15, 2000</i>